

Flyer Series

INDOOR LED



The Flyer Series was designed to make a large impact on a small scale. It offers a variety of features that make it ideal for a number of different applications. Everything from trade shows, to retail spaces, restaurants, way finding and more.

FEATURES



Energy Efficient



Ultra Light



Smart Module



High Gray Scale




Armor Coating



Front Access



IP65

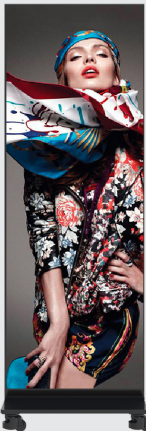

Patented Armor Coating

The Flyer Series features a patented armor coating technology. The surface of the LED module as well as the PCB board is completely sealed with an epoxy resin. This gives the product much more protection against collisions or other incidental contact. This technology also makes the LED modules waterproof, anti-static, and dust proof, making it ideal for high traffic areas and when moisture, oxidation, or other environmental factors could be an issue.

Infinity Edge

The armor coating allows us to extend the LED diodes to the edge of the LED modules, creating an infinity edge display. This creates a more immersive experience, and allows you to place multiple units together to create a larger display.



User-Friendly

The Flyer Series features a built-in controller and content management system. The units can automatically recognize how and where they are setup. An app is included which allows you to remotely manage your content and make other screen adjustments. There is even a cloud software platform which allows you to manage multiple Flyers through a worldwide cloud network.



Easy Installation & Maintenance

The Flyer Series is very lightweight and thin. It can be hung from above, wall mounted, or utilize a base with wheels, making it extremely mobile. The unit is very easy to service. The LED modules can simply be removed from the front with a magnetic tool, allowing you to quickly replace the modules if needed.

Built-In Audio

The Flyer Series features built-in speakers providing stereo sound. This makes it much simpler and streamlined to provide audio when needed.



Call Us: (877) 347-3533
Email Us: sales@fireflyled.com
www.fireflyled.com

Specification	F19618S	F25618S
Pixel Pitch	1.8 mm	2.5 mm
Cabinet Dimension (W×H×D)	1.97x5.9x1.64 ft / 600x1800x500 mm	
Cabinet Resolution (W×H)	320×900 px	240×675 px
Cabinet Weight	77.2 lbs (without base)	
Brightness	50-800CD/m ² Adjustable	
Color Temperature	2500K- 10000K Adjustable	
Viewing Angle	140°	
Refresh Rate	≤ 3840HZ	
Access	Front Access	
Working Temperature	-4°F - 122°F	
Storage Temperature	-4°F - 122°F	
Working Humidity (RH)	10%-90% RH	
Working Voltage	AC90–264VAC, 47–63 HZ	
Max. Power Consumption	450 watts	
Avg. Power Consumption	225 watts	
Processing	≤ 16 bit	
Communication Mode	WiFi, 4G	
Display Mode	Synchronous / Asynchronous	
Operation System	Windows / iOS / Android	

